


# RG6 Downlead

## Cross Section

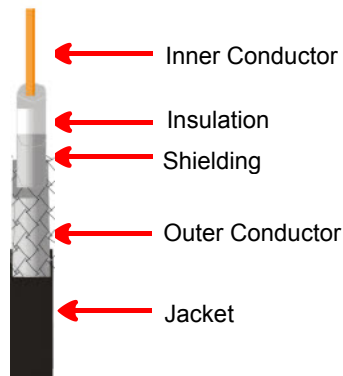

## Specification

<b>Inner Conductor</b> Conductor Dia (+/-0.02mm)	copper clad steel 1.00
<b>Insulation</b>	Foam
<b>Shielding</b>	Aluminium foil
<b>Outer Conductor</b> Conductor Dia.(+/-0.01mm) No. Of wires	Aluminium 0.120 64
<b>Jacket</b> Outer Dia (+/-0.15mm)	PVC (RoHS) 6.4

## Electrical Characteristics

<b>Characteristic Impedance</b>	75 +/-3ohm
<b>Nominal Attenuation @1000MHz</b>	20.82dB



[www.sacelectronics.co.uk](http://www.sacelectronics.co.uk)

Tel/Fax 01332 348533



RoHS Compliant